

jos america

SHOE REPAIR SOLUTIONS

Why Jos America?	4-5
Jos America is a developer	4
Jos America is a manufacturer	4
Jos America is a total supplier	4
Jos America is a provides knowledge	4
Jos America's Flexam brand	5
Jos America is your partner from A-Z	5
Jos America features comprehensive showrooms	5
Jos America's service team	5
Flexam Dynamic Units	6-25
Flexam Dynamic shoe repair machines	8
Y80 dust extraction technology	9
Flexam Dynamic Work Unit 230	10
Flexam Dynamic Work Unit 280	11
Flexam Dynamic Work Unit 330	12
Flexam Dynamic Work Unit 400	13
Flexam Dynamic Work Unit 430	14
Flexam Dynamic Work Unit 475	15
Flexam Dynamic Powerline 300	16
Flexam Dynamic overview	18-24
Flexam City	26-32
Flexam City Work Unit 250	28
Flexam City Powerline 330	29
Flexam City Powerline 395	30
Flexam City Work Unit 395	31
Flexam City overview	32
Explanation shelve possibilities	33
Flexam Master	34-37
Master 160U Work Unit SR	36
Flexam Master overview	37
Colour schemes	38-39
Flexam - A healthy and safe working environment	40-49
Noise reduction	42
Dust extraction	43
Safety	44
Ergonomics	45
Widia technology	46-47
Cutter section	47
Touchscreen	48-49
Projects	50-69



Jos america

Jos America Machines
 Industriepark 'het Hoog'
 Mandenmaker 14
 5253 RC Nieuwkuijk
 The Netherlands
www.josamerica.com

Why Jos America?



Jos America is a developer

The technology and materials used in our Flexam products are developed in-house by highly skilled professionals with a special focus on utilising their purpose to the maximum. We are continually innovating.



Jos America is a manufacturer

All of our machinery equipment, work benches and related products are produced in our production facility in Nieuwtuijk, the Netherlands.



Jos America is a total supplier

Jos America is your business partner for all your requirements in your shoe repair workshop. We support you with everything you need related to machinery, interior fittings and sales presentation of accessories.



Jos America provides knowledge

The staff at Jos America has in-depth knowledge regarding the technology used in the high-quality Flexam range of products.

Jos America's Flexam brand

Our company aims to be as flexible as possible so we can comply with the needs and wishes of all our customers. The Flexam brand name is an abbreviation of FLEXibility and AMerica. Flexam stands for high quality and reliability.



Jos America is your partner from A-Z

Our focus is customer oriented; we do everything we can to meet your needs. Our goal is a stress-free experience and we will support you from A-Z, from the drawing table to after-sales service.



Jos America features comprehensive showrooms

Jos America is located in the Netherlands. In our showrooms you can view and test out a variety of machinery equipment. Our experts provide professional advice regarding machine features including options and possibilities. We also provide an extensive guided tour of our production facilities.



Jos America's service team

The Jos America service team supports customers all over the world in the maintenance of their machine park. The team maintains not only Flexam machines but provides the same service to all other common brands as well. Preventive maintenance is the best way to guarantee a safe and efficient machine park.



— Flexam Dynamic



**High-end quality with
external dust extraction**

The ideal solution when there is sufficient space

Flexam Dynamic shoe repair machines

The best for your workshop and health

Efficiency and quality:

- Offers an ideal, individually tailored combination of features.

Modern technology to increase your quality of life:

Sensor-operated extraction valves

- Thanks to sensor-operated valves, dust extraction channels open and close individually.

Fully dynamic and adjustable to your situation

- Create your own Flexam combination.

Automatic height adjustment

- Essential when different employees use the same machine.

Widia option

- Assures a long grinding disc service life. Ideal for fast removal of materials.

Automatic dust dividing system

- ADDS builds up an air curtain above the scouring belt which prevents dust from reaching the machine's user.

Touchscreen option

- Stores user profiles and prevents unnecessary machinery downtime thanks to a smart service option.

Safety is our number one priority:

- Our products meet the strictest safety requirements of the European CE and NEN standards.

We follow ATEX guidelines and our products are manufactured according to the latest applicable standards.

Training:

- Our qualified experts provide instruction for all machinery and equipment directly following delivery and installation.



V80 dust extraction technology

External dust extraction with vacuum technology


- Extracts dust particles as well as fine dust.
- An effective and low-noise solution (59dB (A)).
- Can be located inside or outside the workshop.
- For shoe repair shops with limited space Jos America developed the City line, which integrates the V80 system into the machine.



Flexam Dynamic Work Unit 230



Flexam Dynamic Work Unit 280

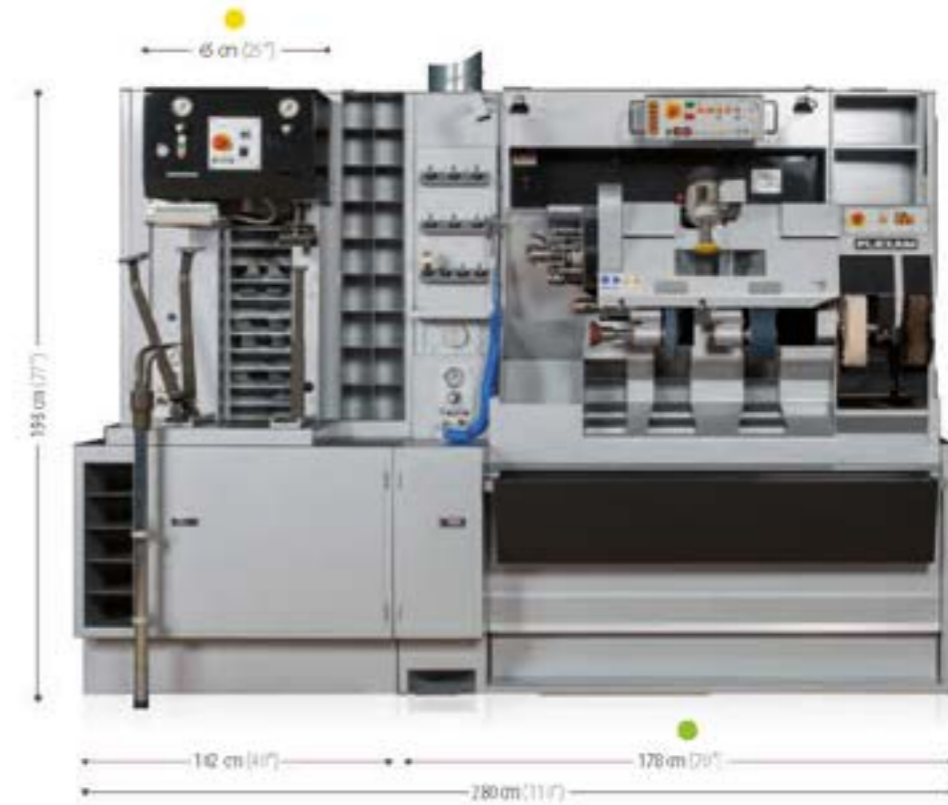

Flexam Dynamic Work Unit 230 consisting of:

- **Press**
 701R13-50,720 Flexam Super Classic (SCU) 65 - 720
 Including Flexam 50, press 65
 worktable, 72 cm width
 double air group safety with air reducer, manometer and 2 connection
 built-in compressor, oil-free, 1A2 16/10
 work stand (chrome) with 3 working legs
 6 pairs of press plates and 1 heel press plate
- **Filterer**
 701R13-1200 Flexam FGBP 120 DYNAMIC 2R
 Including 4-sensor valve technology
 ACCS - automatic dust dividing system
 A3HV - automatic height adjustment 100 - 122 cm
 WTAB - Flexam worktable, 25 cm, on left side with storage space
 VLAZ - floor attraction
 double air group safety with air reducer, manometer and 2 connection
 B - outer section
- **Dust extraction**
 701Z65 V80 Compact Mini Automatic
 Including Frequency controller for optimal control of extracted air volume



Flexam Dynamic Work Unit 280 consisting of:

- **Press**
 701R13-50,1020 Flexam Super Classic (SCU) 65 - 1020
 Including Flexam 50, press 65
 worktable, 102 cm width
 double air group safety with air reducer, manometer and 2 connection
 built-in compressor, oil-free, 1A2 16/10
 work stand (chrome) with 3 working legs
 6 pairs of press plates and 1 heel press plate
- **Filterer**
 701R14-1400 Flexam FGBP 140 DYNAMIC 2R
 Including 5-sensor valve technology
 ACCS - automatic dust dividing system
 A3HV - automatic height adjustment 100 - 122 cm
 WTAB - Flexam worktable, 25 cm, on left side with storage space
 VLAZ - floor attraction
 double air group safety with air reducer, manometer and 2 connection
 C plus multi-head
- **Dust extraction**
 701Z65 V80 Compact Mini Automatic
 Including Frequency controller for optimal control of extracted air volume



Flexam Dynamic Work Unit 330



Flexam Dynamic Work Unit 400



Flexam Dynamic Work Unit 330

(consisting of)

- **Press**
 701R3-SQ 1070 Flexam Super Classic (SQ) 1 105-1070
 Including Flexam SQ press 1 105 worktable, 107 cm width double air group 'safety' with air reducer, manometer and 2 connections built-in compressor, oil-free, 142 l/min work stand (chrome) with 3 working laths 6 pairs of press plates and 1 heel press plate 30° on rear side - Infrared Flexam F 30
- **Finisher**
 701R1 4-TSDW Flexam FS8P 185 DYNAMIC SR W12
 Including 4-sensor valve technology ACDS - automatic dust dividing system A2HV - automatic height adjustment 102-122 cm W12B - Flexam worktable, 25 cm, on left side with storage space V1A2 - floor extraction double air group 'safety' with air reducer, manometer and 2 connections W12A coating disc (60 mm) C plus multi-head
- **Dust extraction**
 701Z6 V80 Compact Mini Automatic
 Including Frequency controller for optimal control of extracted air volume



Flexam Dynamic Work Unit 400

(consisting of)

- **Pre-lander**
 701R1-575D Flexam S75 DYNAMIC SR
 Including 3-sensor valve technology ACDS - automatic dust dividing system A2HV - automatic height adjustment 102-122 cm
- **Press**
 701R3-SQ 1100 Flexam Super Classic (SQ) 1 85-1100
 Including Flexam SQ press 1 85 worktable, 110 cm width 1x 15A on rear side, 1x for small heads and 6x for heads 7 1x 30D on rear side, 6x for shoes 1 188 double air group 'safety' with air reducer, manometer and 2 connections built-in compressor, oil-free, 142 l/min work stand (chrome) with 3 working laths 6 pairs of press plates and 1 heel press plate
- **Finisher**
 701R14-140D Flexam FS8P 140 DYNAMIC SR
 Including 5-sensor valve technology ACDS - automatic dust dividing system A2HV - automatic height adjustment 102-122 cm W12B - Flexam worktable, 25 cm, on left side with storage space V1A7 - floor extraction double air group 'safety' with air reducer, manometer and 2 connections C plus multi-head
- **Dust extraction**
 701Z6 V80 Compact All-in-One



Flexam Dynamic Work Unit 430



Flexam Dynamic Work Unit 475



Flexam Dynamic Work Unit 430

consisting of:

- **Pre-sander**
 701R1-545WD Flexam 555 Widia Dynamic
 - Including: 3-sensor valve technology, ADDS - automatic dust dividing system, AHW - automatic height adjustment 100-122 cm, Widia scouring disc (50 mm)
 - Options: 702R4-60R LED lighting horizontal 60-R
- **Press**
 701R23-SCL1400 Flexam Super Classic (SCL) 1405 - 1470
 - Including: Flexam SCL press II 115 worktable, 147 cm width, 35 A on rear side - 2x for small heels and 1x for heels, 45 A on rear side - 9x for small heels and 18x for heels, double air group 'safety' with air reduces, manometer and 2 connectors, built-in compressor, oil-free, 11A2 6/90, work stand (desimal) with 3 working laths, 6 pairs of press plates and 1 heel press plate, 30R on rear side - Infrared Flexam IF 30
- **Finisher**
 701R14-1400 Flexam RCBP 140 DYNAMIC SR
 - Including: 5-sensor valve technology, ADDS - automatic dust dividing system, AHW - automatic height adjustment 100-122 cm, WTAB - Flexam work table, 25 cm, on left side with storage space, VLAZ - floor extraction, double air group 'safety' with air reduces, manometer and 2 connectors, C plus multi-head
 - Options: 702R4-60R LED lighting horizontal 60-R, 702R4-120R LED lighting horizontal 120-R
- **Dust extraction**
 701280 V80 Compact All-in-One



Flexam Dynamic Work Unit 475

consisting of:

- **Pre-sander**
 701R1-5130WD Flexam 5130 Widia DYN AMIC SR
 - Including: 3-sensor valve technology, ADDS - automatic dust dividing system, AHW - automatic height adjustment 100-122 cm, Widia scouring disc (50 mm)
 - Options: 702R4-60R LED lighting horizontal 60-R
- **Press**
 701R23-SCL1520 Flexam Super Classic (SCL) 165 - 1520
 - Including: Flexam SCL press I 66 worktable, 152 cm width, 60R on rear side - 4x for shoe storage, H 198, double air group 'safety' with air reduces, manometer and 2 connectors, built-in compressor, oil-free, 11A2 16/40, 6 pairs of press plates and 1 heel press plate
- **Finisher**
 701R14-1400 Flexam RCBP 140 DYNAMIC SR
 - Including: 5-sensor valve technology, ADDS - automatic dust dividing system, AHW - automatic height adjustment 100-122 cm, WTAB - Flexam work table, 25 cm, on left side with storage space, VLAZ - floor extraction, double air group 'safety' with air reduces, manometer and 2 connectors, C plus multi-head
 - Options: 702R4-60R LED lighting horizontal 60-R, 702R4-120R LED lighting horizontal 120-R
- **Dust extraction**
 701280 V80 Compact All-in-One



Flexam Dynamic Powerline 300



Flexam Dynamic Powerline 300

consisting of:

- **Pre-sander**
 701R16-575C Flexam 575 City Powerline
 Including 3-sensor valve technology
- **Press**
 701R5-P45-115 Flexam Power Press 45 - 115
 Including Flexam Power Press 45 compressor, oil-free, 1A215/40 cabinet, 30 cm, with rear storage double air/electricity group 1 pair of press plate and 1 heel press plate and adjuster
- **Finisher**
 701R13-T40 Flexam F58P 140 DYNAMIC SP
 Including 5-sensor valve technology
 ADOS - automatic dust dividing system
 APM - automatic height adjustment 140 - 122 cm
 W148 - Flexam work table, 25 cm, on left side with storage space
 BLAZ - floor extraction
 Double air group safety with air reducer, manometer and 2 connected on E-plug outer section
- **Dust extraction**
 701Z80 V80 Compact All-in-One



● Pre-sander



57 cm
(22")

701R1-545D
Flexam Dynamic 545



71 cm
(27")

701R1-555D
Flexam Dynamic 555



85 cm
(33")

701R10-575C
Flexam 575 City Powerline



144 cm
(56")

701R1-S130WD
Flexam Dynamic S130Widia



90 cm
(35")

701R1-575D
Flexam Dynamic 575



107 cm
(42")

701R1-S95WD
Flexam Dynamic 595Widia

● Press



55 cm (21")

701R2
Flexam TRSS



65 cm (25")

701R3=SCL65
Flexam SCL-I 65



45 cm (17")

701R5=P45
Flexam Powerpress 45



90 cm (35")

701R5=P90
Flexam Powerpress-II 90



85 cm (33")

701R3=SCL85
SCL-II 85



105 cm (41")

701R4=SCL105
Flexam SCL-I 105

● Finisher

with double twin cutter



161 cm
(63")

701R13=1200
Flexam Dynamic FSBP 120



176 cm
(69")

701R13=1400
Flexam Dynamic FSBP 140



178 cm
(70")

701R14=1400
Flexam Dynamic RSBP 140



221 cm
(87")

701R13=1850
Flexam Dynamic FSBP 185



221 cm
(87")

701R13=1850W
Flexam Dynamic FSBP 185 Widia



227 cm
(90")

701R14=1850
Flexam Dynamic RSBP 185



227 cm
(90")

701R14=1850W
Flexam Dynamic RSBP 185 Widia

● Finisher

with automatic multi-lead cutter

● Vacuum



701265
V80 Compact Mini Automatic



701280
V80 Compact All-in-One





**Optimal solution with
external dust extraction**

For workshops with limited space

Flexam City Work Unit 250



Flexam City Work Unit 250 consisting of:

- **Press**
201R33-SCL720 Flexam Super Classic (SC) 1165 - 720
- Including: Flexam SC, press 65 worktable, 72 cm width, double air group safety with air release, manometer and 2 connections, built-in compressor, oil-free, 1A216/40, work stand (frame) with 7 working leds, 6 pairs of press plates and 1 heel press plate
- **Finisher**
201R11-43EP100 Flexam F 98P 120 City
- Including: 4-sensor valve technology 140 series, AODS - automatic dust dividing system, 8 outer sections
- Options:
202R4-10R LED lighting horizontal 40-R
202R4-120R LED lighting horizontal 120-R



Flexam City Powerline 330



Flexam City Powerline 330 consisting of:

- **Pre-lander**
201R10-S75C Flexam S75 City Powerline
- Including: 5-sensor valve technology
- **Press**
201R5-P45-115 Flexam Power Press 45 - 115
- Including: Flexam Power Press 45, compressor, oil-free, 1A216/40, cabinet, 30 cm, with rear storage, double air electricity group, 6 pairs of press plates and 1 heel press plate end adapter
- **Finisher**
201R12-R68P140C Flexam R68P 140 City
- Including: 5-sensor valve technology, 140 series, AODS - automatic dust dividing system, C plus multi-head
- Options:
202R4-10R LED lighting horizontal 40-R
202R4-120R LED lighting horizontal 120-R



Flexam City Powerline 395



Flexam City Work Unit 395



Flexam City Powerline 395 consisting of:

- **Press**
701R5-P30-1400 Flexam Power Press II 90 - 1400

Including: Flexam Power Press II 90
worktable, 140 cm width
15F on rear side - for shoe storage H 188
60A on rear side - for shoe storage H 188
15D on rear side - for press plate storage
double air group safety with air reducer, manometer and 2 connectors
built-in compressor, oil-free, 1A/16/40
work stand (chrome) with 3 working led's
spare of press plates and 1 heel press plate
press plate holder Powerflex adapter

- **Finisher**
701R12-RBP185CW Flexam RBP 185 Wida City

Including: 7 sensor valve technology
AOS - automatic dust dividing system
C plus multi-head

Options:
702R4-60R LED lighting horizontal 60-R
702R4-120R LED lighting horizontal 120-R



Flexam City Work Unit 395 consisting of:

- **Press**
701R13-SQ 1300 Flexam Super Classic (SQ) II 85 - 1300

Including: Flexam SQ press II 85
worktable, 130 cm width
1x 15A on rear side - for small heels and for heels /
1x 10D on rear side - for shoes H 188
double air group safety with air reducer, manometer and 2 connectors
built-in compressor, oil-free, 1A/16/40
work stand (chrome) with 3 working led's
spare of press plates and 1 heel press plate

- **Finisher**
701R12-RBP185CW Flexam RBP 185 Wida City

Including: 7 sensor valve technology
AOS - automatic dust dividing system
C plus multi-head

Options:
702R4-60R LED lighting horizontal 60-R
702R4-120R LED lighting horizontal 120-R



Flexam City

Flexam City



701R11=FSBP120C
Flexam City FSBP 120



701R11=FSBP140C
Flexam City FSBP 140



701R12=RSBP140C
Flexam City RSBP 140





701R12=RSBP185CV
Flexam City RSBP 185 Wildia


Explanation shelf possibilities Flexam Dynamic & Flexam City

Flexam SCL press
worktable, 130 cm
1x 15A on rear side
1x 30D on rear side
double air group's
built-in compressor

See below an overview of our shelf possibilities.
The first two digits represent the width of our shelf cabinets:
15=150mm, 30=300mm, 45=450mm, 60=600mm
The letters (A,B,C,D,E,F or G) correspond with the specific construction.

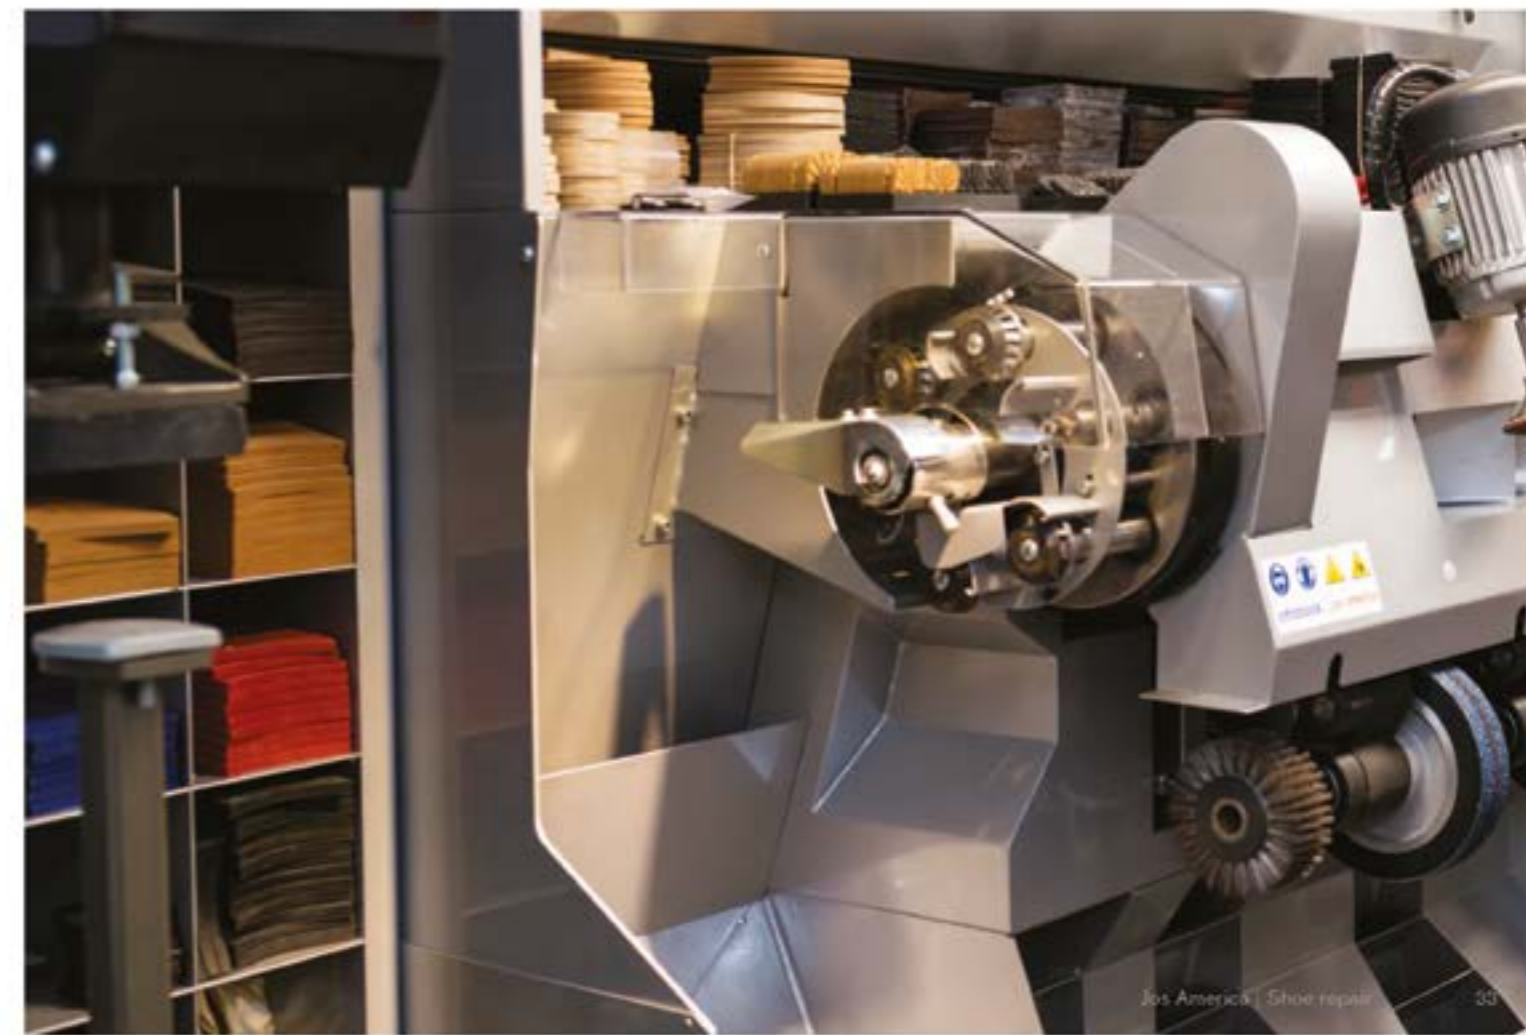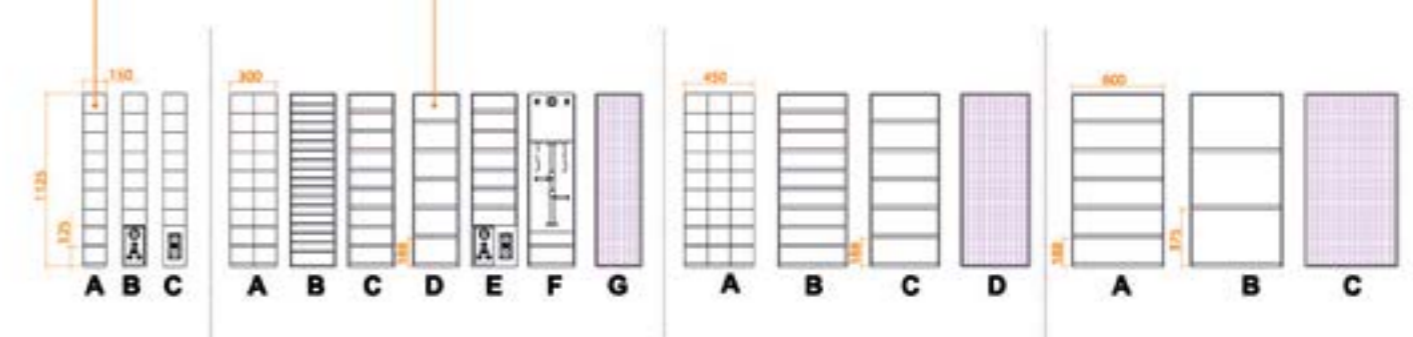

— Flexam Master

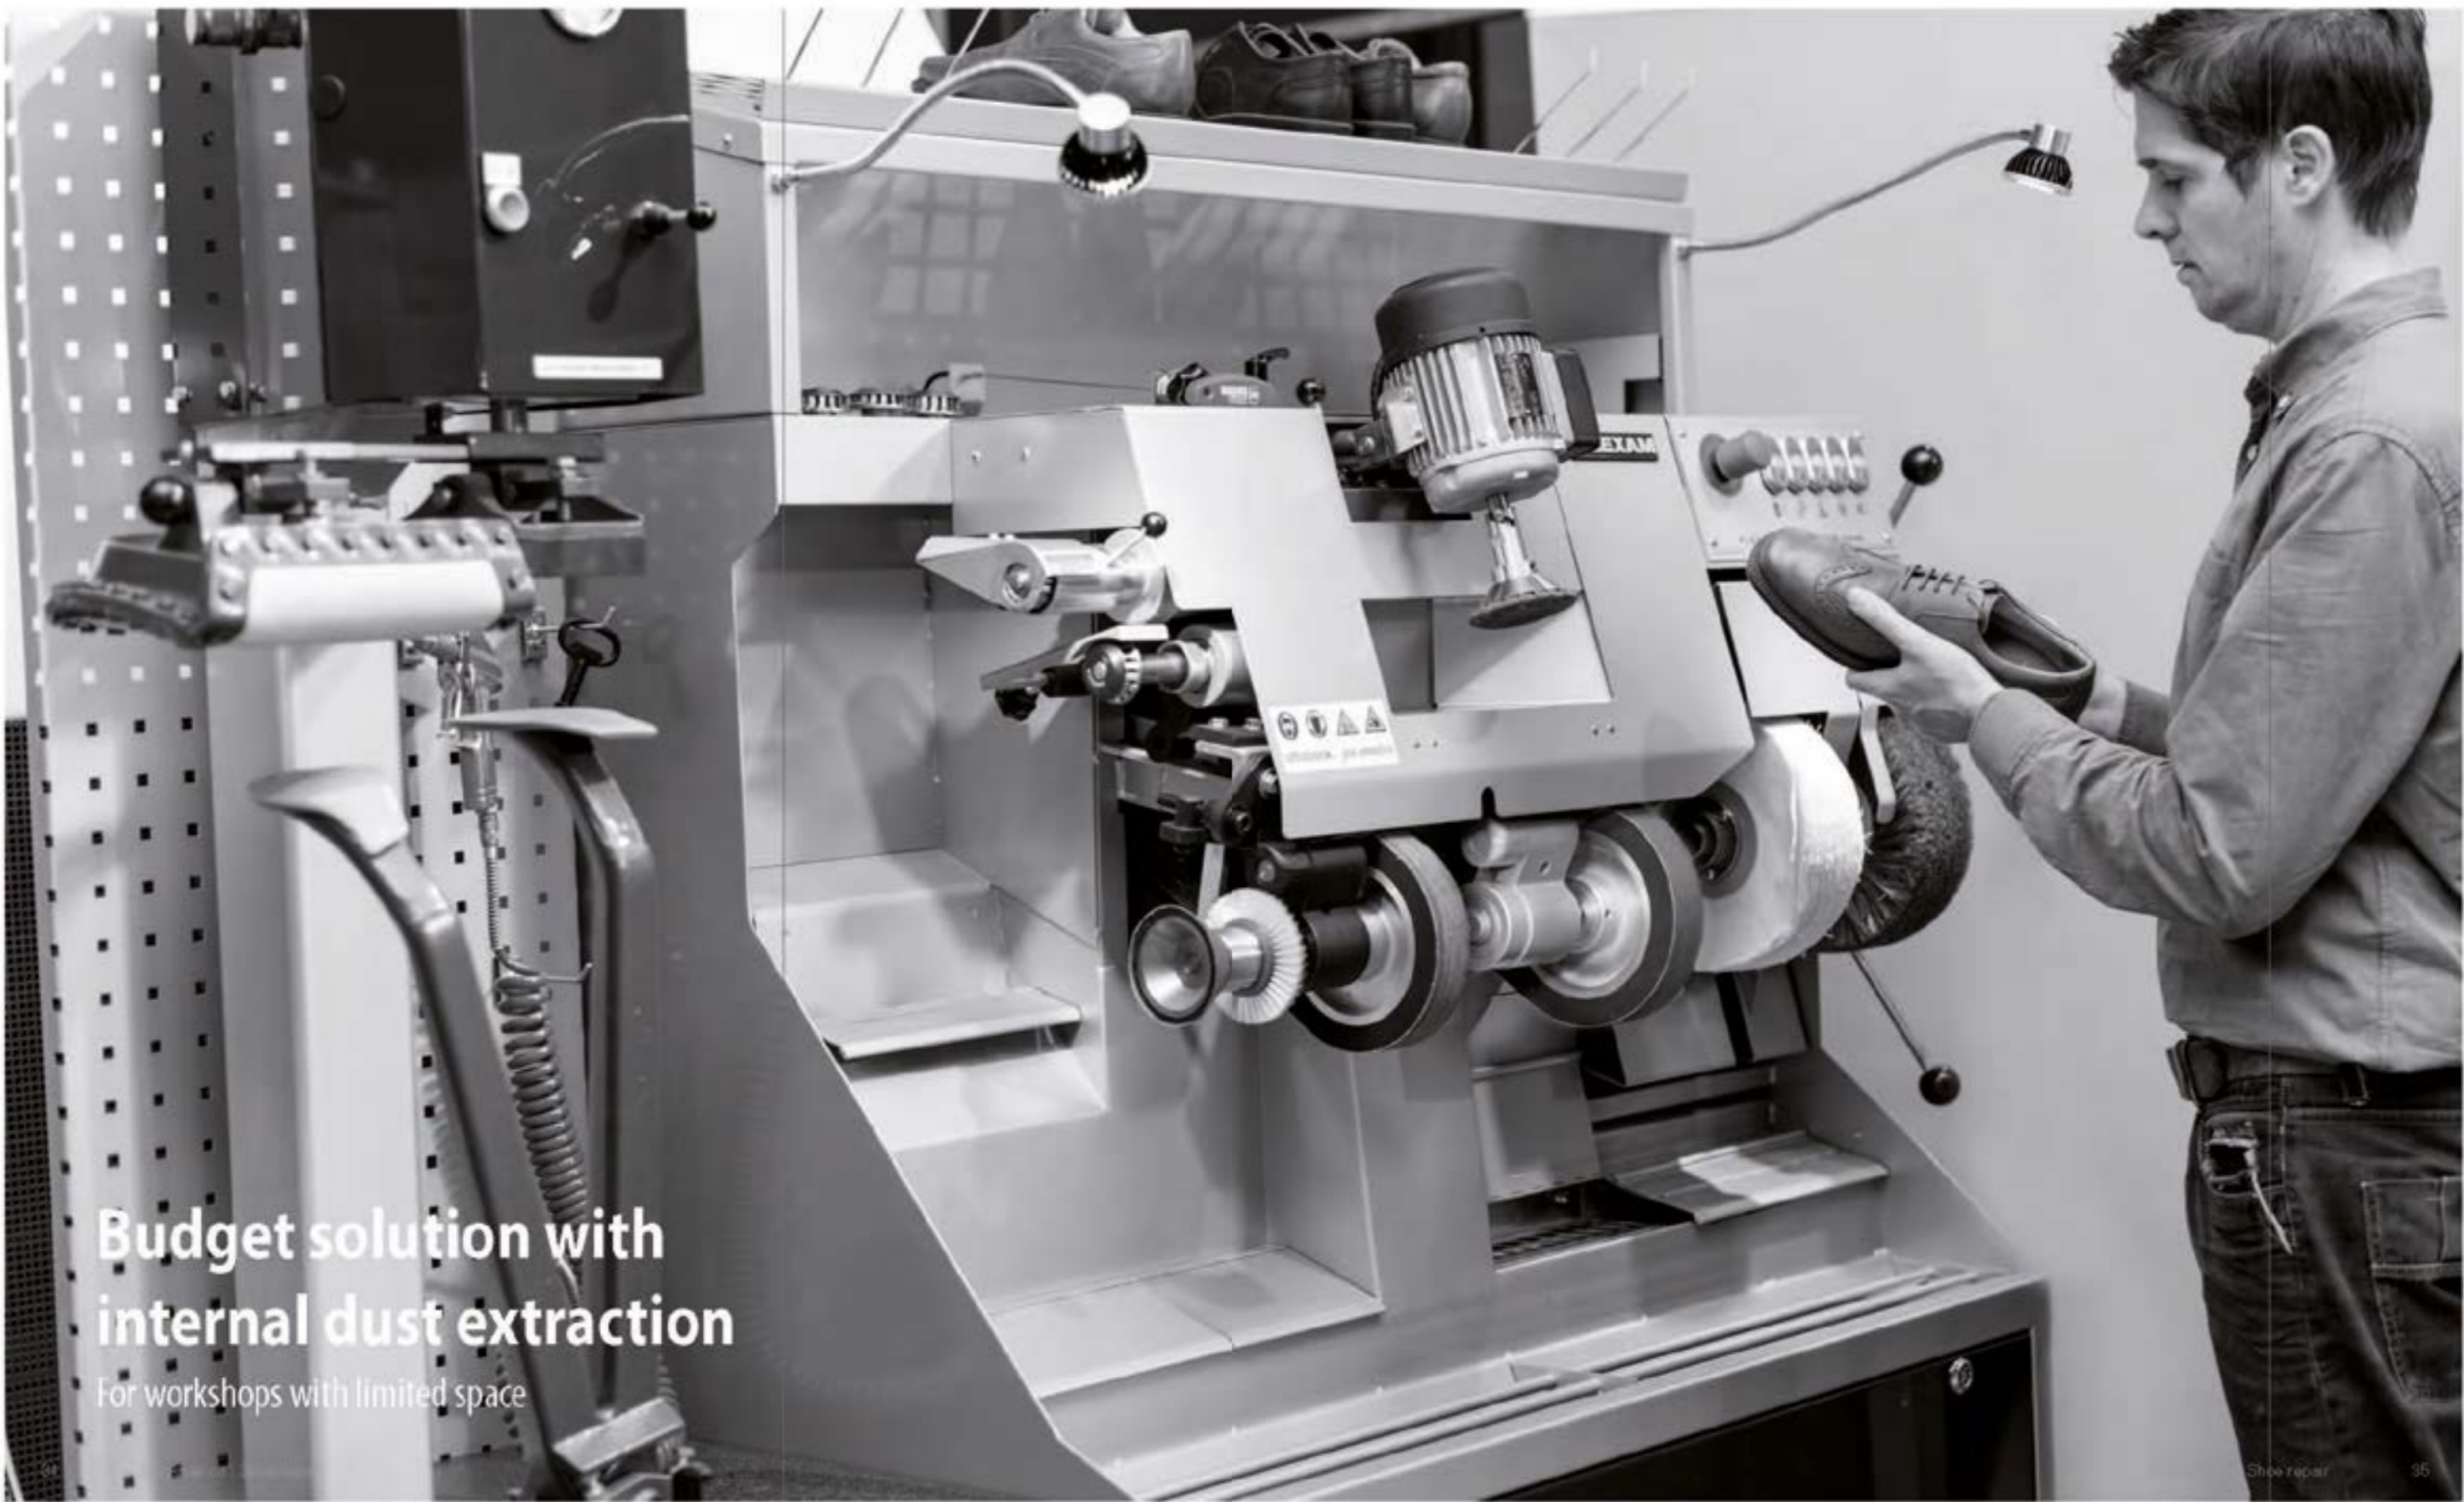

**Budget solution with
internal dust extraction**

For workshops with limited space

Master 160U Work Unit SR



Master 160U Work Unit SR

701R35=160U consisting of:

● Press

701R20=45C Master 45C Press SR

Including:

built-in compressor
liquid-filled cabinet
6 pairs of press plates

● Finisher

701R21=115Bx400 Master 115B Combi SR

Including:

heel cutter, 18 mm, with guide
1 sole cutter on bayonet
heel cone on bayonet
2 long sooling belts
narrowing bayonet, 90 mm diameter
triple polishing unit for black, brown and natural polishing
storage rack
dust extraction

Flexam Master

● Flexam Master



701R35=160U
Master 160U Work Unit SR



701R21=115Bx400
Master 115B Combi SR



701R20=45C
Master 45C Press SR

Colour schemes

Standard machine colour grey metallic Ral 9006. You can choose between 8 different accent colours.

● Black Grey



702R6-7021

● Anthracite Grey



702R6-7016

● Pearl Night Blue



702R6-5026

● Ruby Red



702R6-3003

● Opal Green



702R6-6026

● Traffic Green



702R6-6024

● Signed Black



702R6-9007

● Signal Blue



702R6-5005



RAL
Colour of choice

A healthy and safe
working environment



Noise reduction

Flexam machines and the V80 vacuum dust extraction systems comply with the latest safety regulations. Extremely low noise levels come thanks to the Flexam machines' precise development and construction.

The result is a pleasant, low-noise environment in which you can work and communicate with your customers.



Isolated machine compartment

Equipped with special noise-reducing materials.



Aerodynamic noise-reducing dust extraction channels

Specially designed to combine low noise levels with high extraction performance.



Tightly sealed valves

The fully automatic system features round valves with a sturdy rubber layer to prevent hissing valves.



Vibration-free construction

The motor frame is separated from the chassis using anti-vibration rubber pads.



Dust extraction

Not only visible dust particles cause damage to health and safety. Above all, long-term exposure to invisible dust requires particular attention. Health issues are not usually immediate, but rather arise after a number of years. Fortunately, shoe repair workshops are increasingly recognising the importance of a dust-free working environment.

Jos America is known for its effective V80 dust extraction series, which includes suitable models for shoe repair shops of any size. Please see below for a number of our innovative technologies that can help you to minimise dust in your workshop.



Flexam dust filters

Specially designed for Flexam machines, ensuring a long service life and filtering performance. The dust extraction system is equipped with a self-filter-cleaning system.



Unique Flexam filtering for fine dust

Flexam machines can be fitted with a second absolute filter, which prevents these small dust particles from returning to the workshop.



ADDS - automatic dust dividing system

A compressed air outlet creates an air curtain above the scouring belt, separating dust particles from the employee working at the machine.



Sensor-operated valve technology

Dust extraction performance is maximised by dust extraction channels that are individually operated using sensor technology.



Safety

During the design and construction of our machines we take into account the strictest safety regulations and use corresponding raw materials and components. Our products meet the most stringent safety requirements of the European CE and NEN standards. We follow ATX guidelines and our products are manufactured according to the latest applicable standards.

We therefore strive to provide you with the clearest, most comprehensive information possible regarding all aspects applicable to the safe use of our products. This is why our machines are equipped with the necessary safety and warning stickers and accompanied by a detailed manual as well as a technical file.

Your safety and health are important to us!



Safe operation

All Flexam machines are fitted with control units in compliance with the highest CE norms.



Fire safety

The automatic valve system ensures direct closure of the air supply, while the rear side of the machine is fully closed off by means of a metal plate. This combination of features reduces risks to a minimum.



Easy-access front cover

The Flexam front lid can be fully opened so that the user has easy access to the motor compartment. The risk of personal injury while replacing the scouring belts is reduced to a minimum.



Emergency stop

Emergency stop in sight and within easy reach.



Thermally secured

Flexam machines are equipped with thermal security switches which prevent the motor from getting overheated by turning it off immediately.



Ergonomics

A correct working position is essential! Flexam machines are cutting edge and include innovative ergonomic features which allow your employees to work in an appropriate, healthy position.

This position varies according to the correct working height, good visibility and safe accessibility for operating the machines.



Automatic height adjustability

The central axle height of the Flexam Dynamic series can be adjusted between 1020–1220 mm, making it very suitable for employees with varying body heights.



LED spotlights

Normal ceiling lights in a workshop may not be sufficient for certain activities. The Flexam machine therefore comes standard equipped with two adjustable LED fixtures.



Centrally positioned operating panel

Each Flexam machine has a central operating panel positioned above the machine. All switches are easily accessible and the position of the operating panel leads to an active posture.



Adjustable naumkeag

The centrally positioned naumkeag (bire) is fully adjustable so employees can carry out their work in an ergonomic fashion. The naumkeag (bire) can be tilted, pulled in and out and rotated.



Executive Plus

Employees who suffer from back problems can order the Flexam Executive Plus machine. This machine is fitted with a multi-adjustable work chair, which can slide in front of the machine on a rail.





Widia technology

Widia

Widia scouring discs are developed to allow you to work much more quickly when sanding materials, thereby reducing hazardous fumes to a minimum. Widia discs are extremely durable even after 5 years of intensive use and significantly reduce costs compared to normal sanding belts. Flexam Widia rolls are always weight-balanced and run smoothly for professional use.



Cutter section

Cutters

The cutter section is comfortably and ergonomically positioned on the left side of the machine. A safe distance is maintained between the cutter components. If a Flexam machine is equipped with a multi-head cutter section, the heel cutter and the multi-head sole cutter have separate motors.

B cutter section

Heel cutter with 18 mm guide and sole cutter on bayonet. Includes 3 metal cutters.



B-plus cutter section

The B-plus version is a combination of the B cutter section and a Widia micro-roll with guide. This construction is only possible on Flexam machines if the left bayonet fitting contains its own dust extraction diaphragm. Includes 3 metal cutters.



C multi-head

The standard 6-side revolving multi-head contains 5 AC fixed sole cutters and one cutter mounted on a bayonet, so that you can easily exchange with other cutters. This revolving cutter is driven by three motors, so that the cutter motor and the sole cutter motor can be operated separately. The 18 mm heel cutter and guide is centrally positioned in the middle of the multi-head, providing ample working space.



C plus multi-head

Multi-head cutter with Widia mikro-roll

The C-plus is a combination of the C multi-head cutter and the Widia mikro scouring roll. This construction is only possible on Flexam machines if the left bayonet fitting contains its own dust extraction diaphragm.





Touchscreen

Flexam machines now with touchscreen

The new Flexam can do everything our classic version can. But the touchscreen offers even more. What's the best way to perfect a classic? By retaining all of its successful features whilst making it even more user-friendly!

Enhanced comfort, decreased energy consumption

With the new dust-free touchscreen control panel, you now have the instruction manual to hand whenever you need it. Another new feature is the handy energy-saving standby mode.

Individual control

Shoe repair workshops are international – and so is the new Flexam, which can now be operated in your desired language. Cleaning times can also be saved as required.

Personal profiles

Create the perfect workplace for each of your employees by generating multiple user profiles with the new touchscreen control panel. Parameters such as different working levels can be set with a simple touch of the screen.

Remote maintenance

To allow you to continue your work uninterrupted, our service department monitors various key parts of the machine online and notifies you as soon as a maintenance check is required or a part needs to be replaced. And we're already working on the next step – soon you'll be able to order supplies directly via the touchscreen.



France (Cysoing)



Italy (Moro)



The Netherlands (Ede)



Belgium (Bornem)



The Netherlands (Amstelveen)



Jos Amerca's Shoe repair

The Netherlands (Boxtel)



France (Argeles sur mer)



Belgium (Edegem)



The Netherlands (Maassluis)



The Netherlands (Vlijmen)

Belgium (Gent)



The Netherlands (Beek)

Spain (Madrid)





jos america

Jos America Machines
Industriepark 'het Hoog'
Mandenmaker 14
5253 RC Nieuwkuijk - The Netherlands
info@josamerica.com
www.josamerica.com